

SCC

Taping and Packing

■Taping

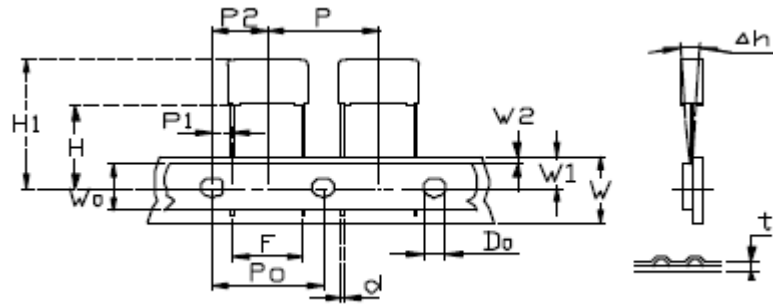


Fig 1 Pitch: 5.0 P₀=12.7
Pitch: 7.5 P₀=15.0

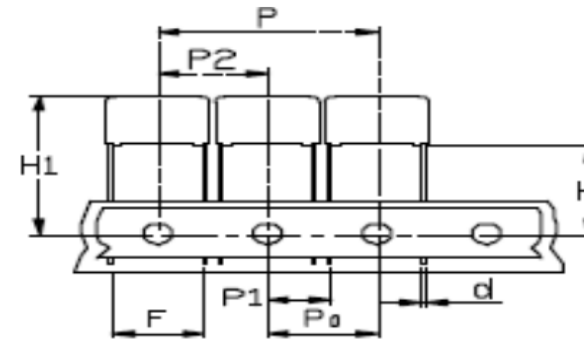


Fig 2 Fig 1 Pitch: 7.5 P₀=12.7
Pitch:10.0 P₀=15.0

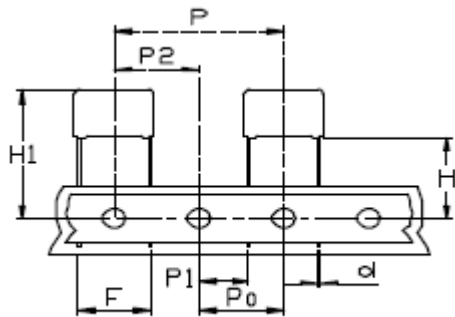


Fig 3 Pitch:10/12.5/15 P₀=12.7

Fig 1.2.3	塗装	盒装	備註
	T<8.0	T≤6.5	不空格
	T≥8.0	T>6.5	空一格


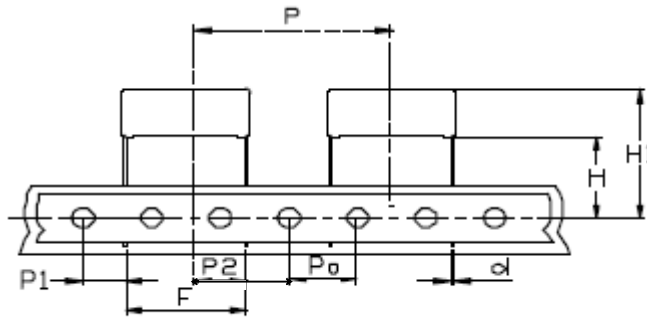


Fig 4 Pitch: 20.0/22.5/27.5 P₀=12.7

Fig 4	塗装	盒装	備註
	T<14	T<13	不空格
	T≥14	T≥13	空一格

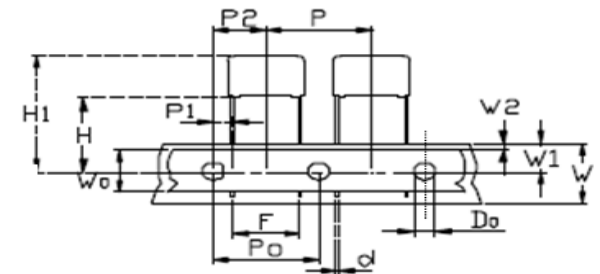

Pitch: /7.5 P₀=12.7

特殊圖形 S36 非標準圖形
熱溶膠帶內打彎

SCC


Taping and Packing

■ Taping

代號	直腳 TP 尺寸 (mm)											
	Fig. 1		Fig. 2		Fig. 3			Fig. 4			S36	誤差
	P:5.0	P:7.5	P:7.5	P:10.0	P:10.0	P:12.5	P:15.0	P:20.0	P:22.5	P:27.5	P:7.5	
D0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	±0.1
F	5.0	7.5	7.5	10.0	10.0	12.5	15.0	20.0	22.5	27.5	7.5	±0.2
H	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	塗裝品±0.5 盒裝品±0.3
H1	32.2	32.2	32.2	39.0	39.0	39.0	39.0	44.0	44.0	44.0	32.2	MAX
P	12.7	15.0	25.4	30.0	25.4	25.4	25.4	38.1	38.1	38.1	12.7	±0.5
P0	12.7	15.0	12.7	15.0	12.7	12.7	12.7	12.7	12.7	12.7	12.7	±0.2
P1	3.85	3.75	3.75	5.0	7.7	6.45	5.2	9.05	7.8	5.3	2.6	±0.2
P2	6.35	7.5	12.7	15.0	12.7	12.7	12.7	19.05	19.05	19.05	6.35	±1.3
t	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.7	Max
W	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	±0.2
W0	8.0	8.0	8.0	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.0	min
W1	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	±0.2
W2	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	Max
△h	0	0	0	0	0	0	0	0	0	0	0	±2.0

■ Packing

Ammo Packing

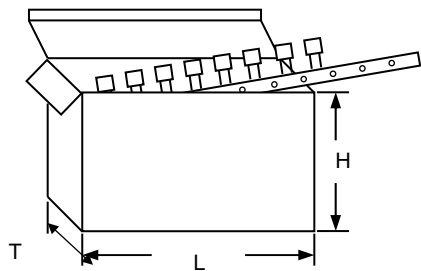

H1(mm)	(L*H*T)±3mm
≤ 35	330*264*48
≤ 46	330*264*58
≤ 51	330*264*65